

# Industrial Thermometers


## DIN 16185 B, DIN 16186 B

### SIKA Thermometer, straight type

- Casing 150 x 36 mm, Type 291 B
- DIN 16185 B
- Thread connection: G $\frac{1}{2}$ A =  $\frac{1}{2}$ " BSP
- Approved by German Lloyd Certificate No. 94 654-94 HH



Range [°C]	Order code for complete instruments								
	Immersion length [I1] 63 mm			Immersion length [I1] 100 mm			Immersion length [I1] 160 mm		
	SIKA 2912 ...	ISSA 61...	IMPA	SIKA 2912 ...	ISSA 61...	IMPA	SIKA 2912 ...	ISSA 61...	IMPA
-60 +40	...641106321	...111.01		...641110021	...111.02		...641116021	...111.03	
-30 +50	...351106321	...111.10	651941	...351110021	...111.11	651942	...351116021	...111.12	651943
0 +60	...061106321	...111.16		...061110021	...111.17		...061116021	...111.18	
0 +100	...101106321	...111.22	651944	...101110021	...111.23	651945	...101116021	...111.24	651946
0 +120	...121106321	...111.28		...121110021	...111.29		...121116021	...111.30	
0 +160	...161106321	...111.34	651947	...161110021	...111.35	651948	...161116021	...111.36	651949
0 +250	...251106321			...251110021			...251116021		
0 +600	...601206322	...111.80	651962	...601210022	...111.81	651963	...601216022	...111.82	651964

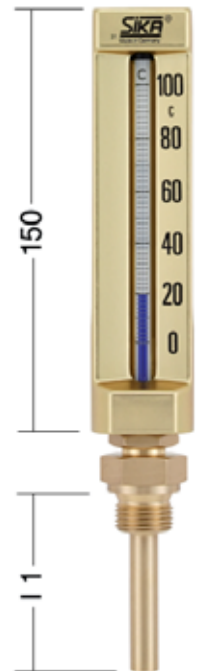


### SIKA Thermometer, angle type 90°

- Casing 150 x 36 mm, Type 292 B
- DIN 16186 B
- Thread connection: G $\frac{1}{2}$ A =  $\frac{1}{2}$ " BSP
- Approved by German Lloyd Certificate No. 94 654-94 HH



Range [°C]	Order code for complete instruments								
	Immersion length [I1] 63 mm			Immersion length [I1] 100 mm			Immersion length [I1] 160 mm		
	SIKA 2922 ...	ISSA 61...	IMPA	SIKA 2922 ...	ISSA 61...	IMPA	SIKA 2922 ...	ISSA 61...	IMPA
-60 +40	...641106321	...114.03		...641110021	...114.04		...641116021	...114.05	
-30 +50	...351106321	...114.08	652041	...351110021	...114.09	652042	...351116021	...114.10	652043
0 +60	...061106321	...114.13		...061110021	...114.14		...061116021	...114.15	
0 +100	...101106321	...114.18	652044	...101110021	...114.19	652045	...101116021	...114.20	652046
0 +120	...121106321	...114.23		...121110021	...114.24		...121116021	...114.25	
0 +160	...161106321	...114.28	652047	...161110021	...114.29	652048	...161116021	...114.30	652049
0 +250	...251106321			...251110021			...251116021		
0 +600	...601206322	...114.43	652062	...601210022	...114.44	652063	...601216022	...114.45	652064



Also available with thread connections: G $\frac{3}{4}$ A, M20x1.5, M27x2,  $\frac{1}{2}$ " NPT